

## Hood Garage



Hoods

Code: 2515 060

60 cm



### DETAILS

Texture Brushed in line

---

Material Stainless steel

---

Energy class A

---

Product details Disappearance

---

Grease filters Grease filters in stainless steel: 1 filtre for 60 cm hood, 3 filtres for 90 cm hood, 4 filtres for 120 cm hood

---

Operation Suction hood (filtering mode with optional carbon filters)

---

Air exhaust hole  $\varnothing$  120/150 mm

---

Lighting LED lighting (4.000 kelvin)

---

Air flow rate 800mc/h

---

Motor power 275W

---

Hood type Wall-mounted suction hood

---

Type of commands Easy electronic controls

---

Suction speed 4 operating speeds

---

Notes: Fume exhaust ducts must have an internal diameter not lower than 120 mm

---

## FEATURES

**Steel filters** Where the filter is in plain sight, the aluminium filtering element is covered in stainless steel. This solution improves the look and increases the durability of the product.

---

**Led lighting** Particular attention to energy saving with LED lighting systems. They assure a 10 times lower consumption and a 10 times longer duration. Our LED lights are designed to create an adequate comfort and safety in the cooking area.

---

**Retro mode exit** The motor can be rotated by 90°. In consequence the air outlet can be directed towards the back, the classical solution, but also toward the wall, with direct exit towards a specifically foreseen duct. With this kind of installation the chimney is therefore no longer necessary and is, in consequence, supplied as an option.

---

**Balanced suction system** This feature, exclusively available on Foster hoods, improves the suction uniformity on the whole surface, thanks to a specific, irregular perforation pattern that compensates the loss of suction power in the terminal tracts. It is particularly efficient in the island hoods and in the wall hoods of large size (120 cm).

---


**Safe&clean system** The Safe&Clean system features a stainless steel panel installed between the hood's filters and motor. The panel constitutes a flat and easy-to-clean surface, it improves the suction homogeneity on the whole surface and is also an efficient safety system because it prevents the fan and electronic parts from being easily accessible.

---

**Auto delayed shutdown** All the models with electronic interface can be programmed to turn off the suction at a postponed moment, so as to prolong the aeration of the room even after the cooking has been completed.

---

## TECHNICAL DATA

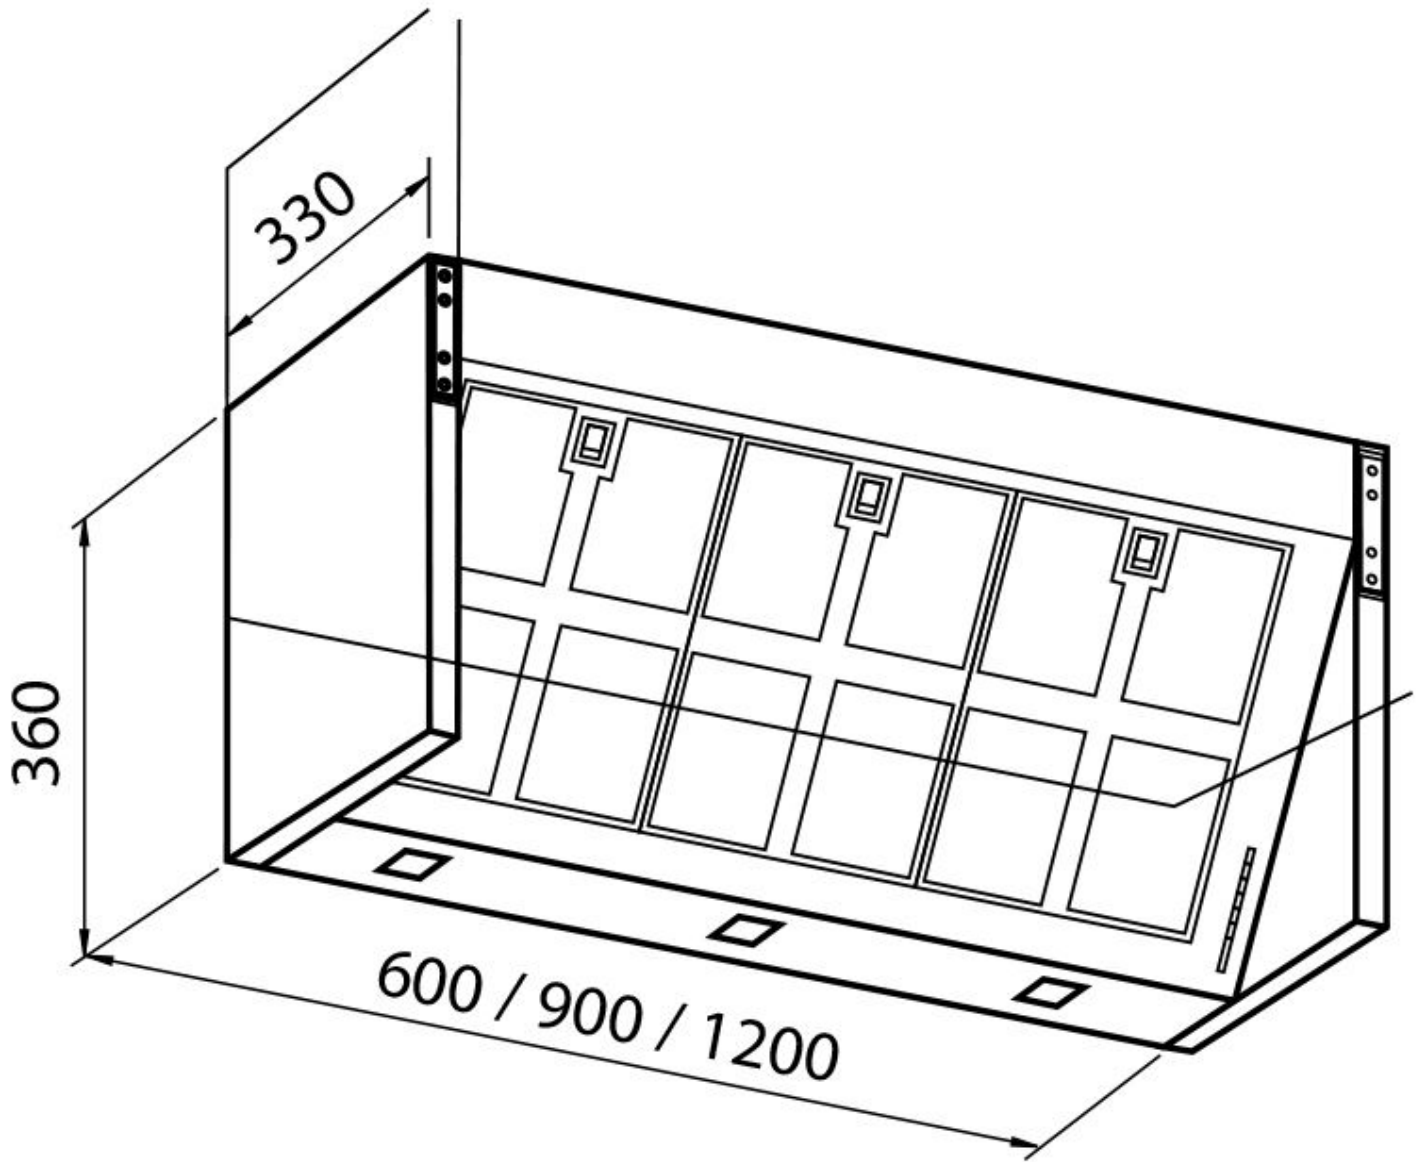


## GALLERY




## OPTIONAL ACCESSORIES




**Carbon filter**  
9700 601

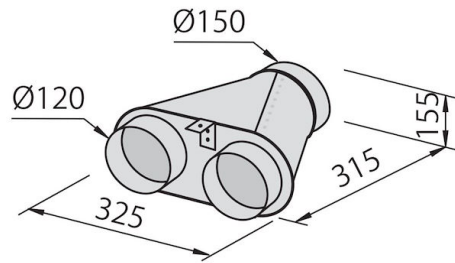

**Collector for 2 pipes**  
2523 000

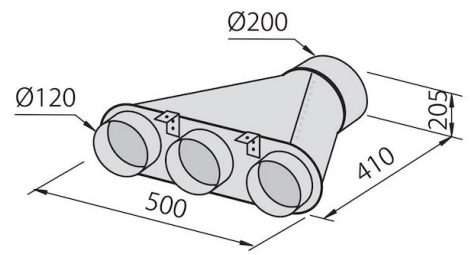

**Collector for 3 pipes**  
2524 000

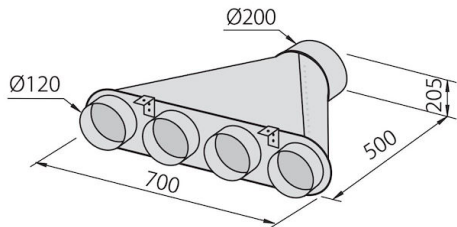

**Collector for 4 pipes**  
2525 000



**Flexible silencing canalization**  
9700 602



**Flexible silencing canalization**  
9700 603